
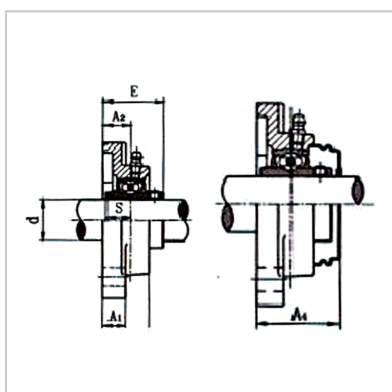
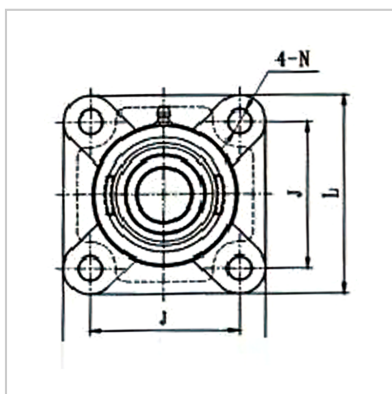


Exterior spherical bearing housing

UCF200 square seat with top thread-UCF201S

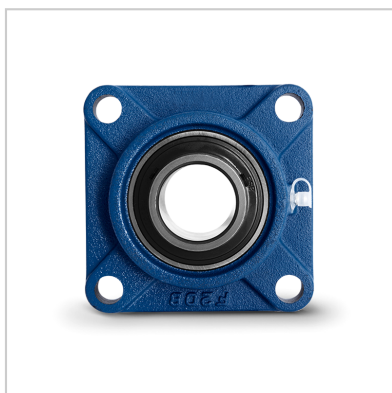

Bearing code : UC201S

Axis diameter d : 12

Dimensions (mm) :

J : 76

L : 125

A2 : 15

A1 : 11

A : 24.5

E : 30.9

N : 11.5

S : 11.5

Bolt specifications : M10

model : UCF201S

Seat code : F203

weight :

Kg : 0.39

介绍:

Outer spherical ball bearings are actually a variant of deep groove ball bearings, characterized by a spherical outer diameter surface on its outer ring, which can be fitted into the corresponding concave spherical surface of the bearing seat for centering.

It is mainly used to bear radial and axial combined loads, mainly radial loads. Generally, it is not suitable to bear axial loads alone. This type of bearing can be separately installed with an inner ring (with a full set of rollers and retainers) and an outer ring. This type of bearing does not allow the shaft to tilt relative to the housing, as it will generate additional axial force under radial load. The size of the axial clearance of this type of bearing is closely related to its normal operation. When the axial clearance is too small, the temperature rise is relatively high; When the axial clearance is large, the bearing is prone to damage. Therefore, special attention should be paid to adjusting the axial clearance of the bearing during installation and operation. If necessary, pre interference installation can be used to increase the rigidity of the bearing.